





BETON DE CLERCQ

PREFABBETON & WATERBEHANDELINGSSYSTEMEN


BETON DE CLERCQ BV - Steenkaai 111- 8000 Brugge - TEL. +32(0)50 317361 - onthaal@declercq-beton.be




FUNDERINGSBLOK / BLOC DE FONDATION

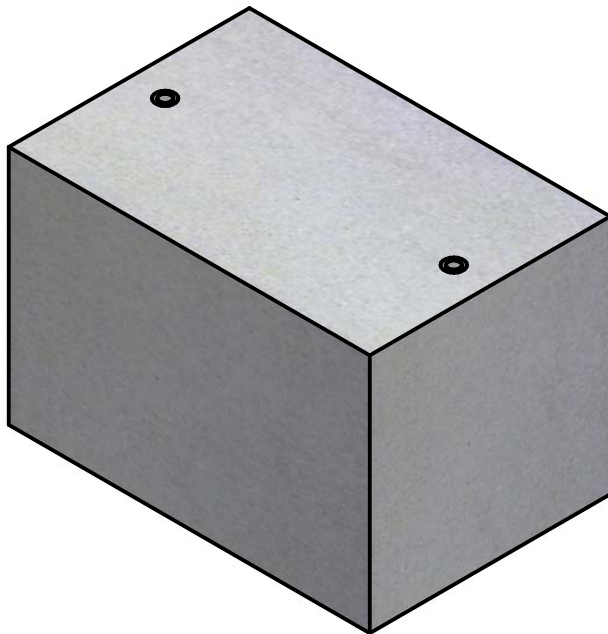


Dwarsdoorsnede

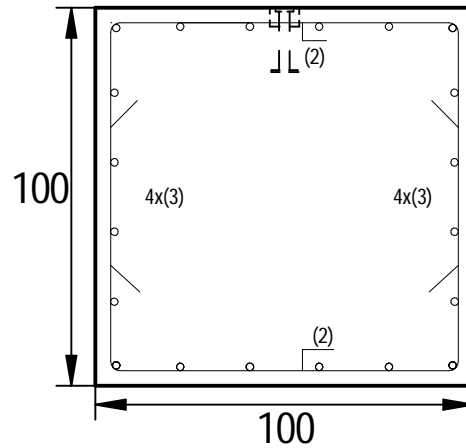

Bovenaanzicht

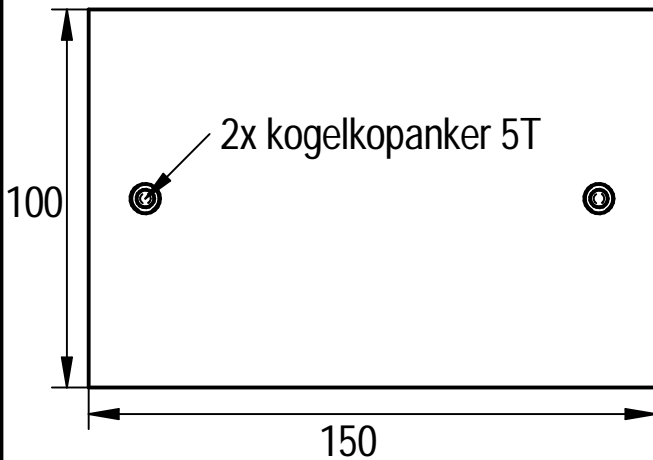

Langsdoorsnede

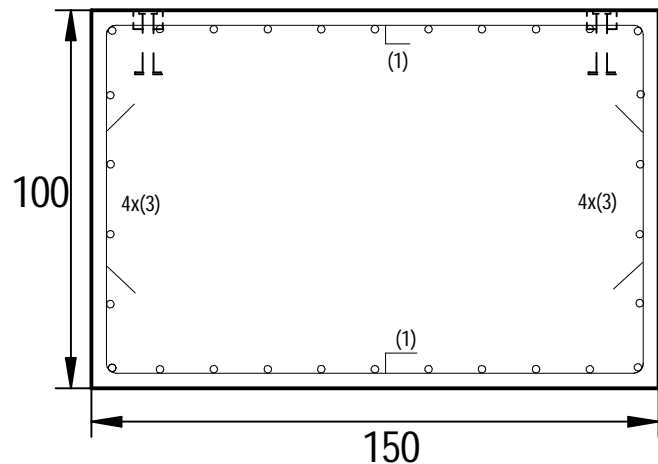

Staalborderel

Nr. staaf	Ø	Aantal	Plooi vorm	A(cm)	B(cm)	C(cm)	Snij lengte (m)	Tot. lengte (m)
1	12	9x14	21	75	142	75	2,90	364,90
2	12	9x20	21	75	92	75	2,40	432
3	12	9x8	21	140	90	60	2,88	207,07

Geometrische kenmerken / Caractéristiques géométriques

Breedte x Lengte x Hoogte	Gewicht kg
100x100x100	2450
150x100x100	3675
200x100x100	4900

Wapening:

(1) 2x7=14Ø12-150



(2) 2x11=20Ø12-150



(3) 2x4=8Ø12-150



TECHNISCHE FICHE / FICHE TECHNIQUE

Milieuklasse / Classe d'exposition XC4+XF1+XA2	Hijsvoorziening 2x KKA 5T	Eenheid cm
Omgevingklasse / Classe d'environnement EE3+EA2+EA3	Tekenaar Jo Verbeken	Formaat A4
Sterkteklasse / Classe de résistance C40/50 CEM I 52.5R Benor	Productie / Production Brugge	