





BETON DE CLERCQ

PREFABBETON & WATERBEHANDELINGSSYSTEMEN


BETON DE CLERCQ BV - Steenkaai 111- 8000 Brugge - TEL. +32(0)50 317361 - onthaal@declercq-beton.be




FUNDERINGSBLOK / BLOC DE FONDATION

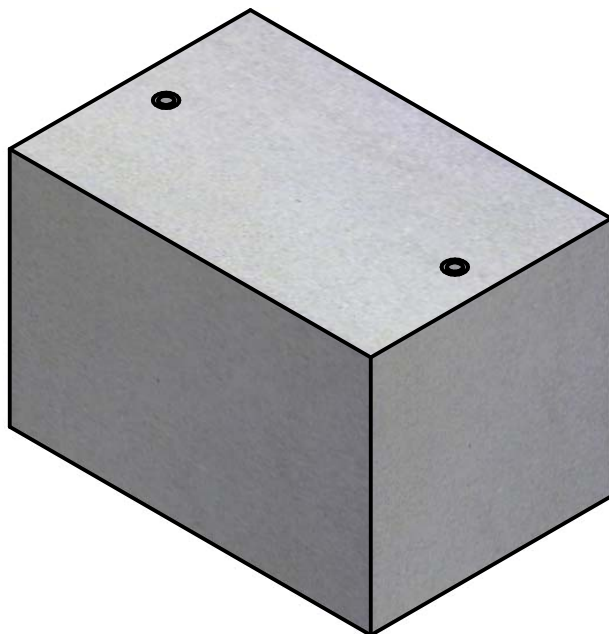


Dwarsdoorsnede

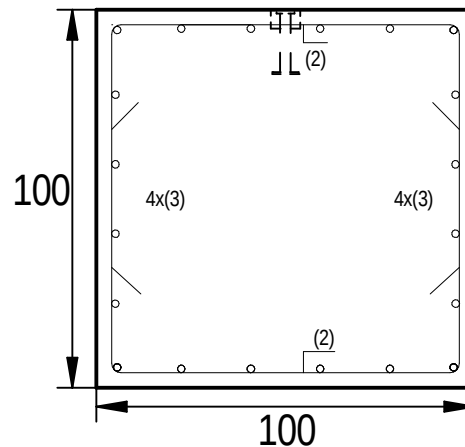

Bovenaanzicht

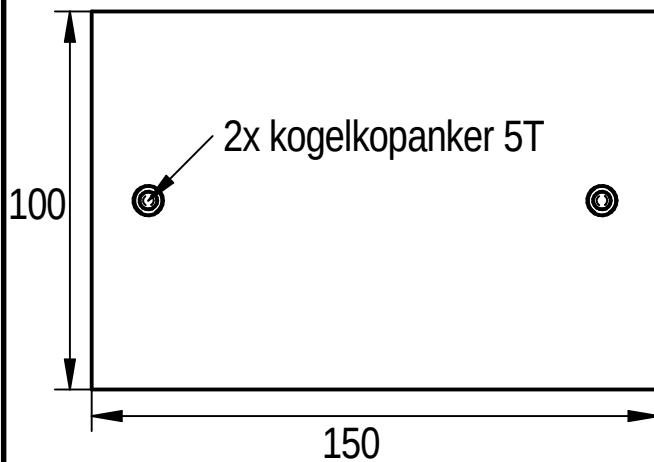

Langsdoorsnede

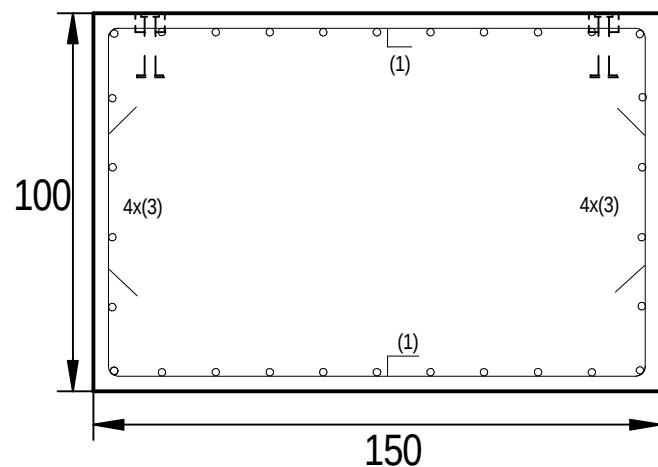

Geometrische kenmerken


B(cm)	L(cm)	H(cm)	Gewicht(kg)
100	100	100	2450
150	100	100	3675
200	100	100	4900

Staalborderel

Nr.	Ø	Aantal	Plooi vorm	A(cm)	B(cm)	C(cm)	Snij lengte (m)	Tot. lengte (m)
1	12	9x14	21	75	142	75	2,90	364,90
2	12	9x20	21	75	92	75	2,40	432
3	12	9x8	21	140	90	60	2,88	207,07

Bijlegwapening

(1)	2x7	Ø12	150
(2)	2x11	Ø12	150
(3)	2x4	Ø12	150

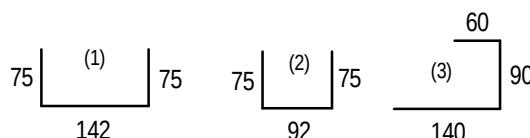

TECHNISCHE FICHE / FICHE TECHNIQUE			
Milieuklasse / Classe d'exposition	Hijsvoorziening	Eenheid cm	
XC4+XF1+XA2	2x KKA 5T		
Omgaveingsklasse / Classe d'environnement	Tekenaar	Formaat A4	
EE4+EA2+EA3	Jo Verbeken		
Sterkteklasse / Classe de résistance	Productie / Production		
C40/50 CEM I 52.5R Benor	Brugge		